


Read data captured in 6802 through sub-20 (logic analyzer inputs at 6802 pins)

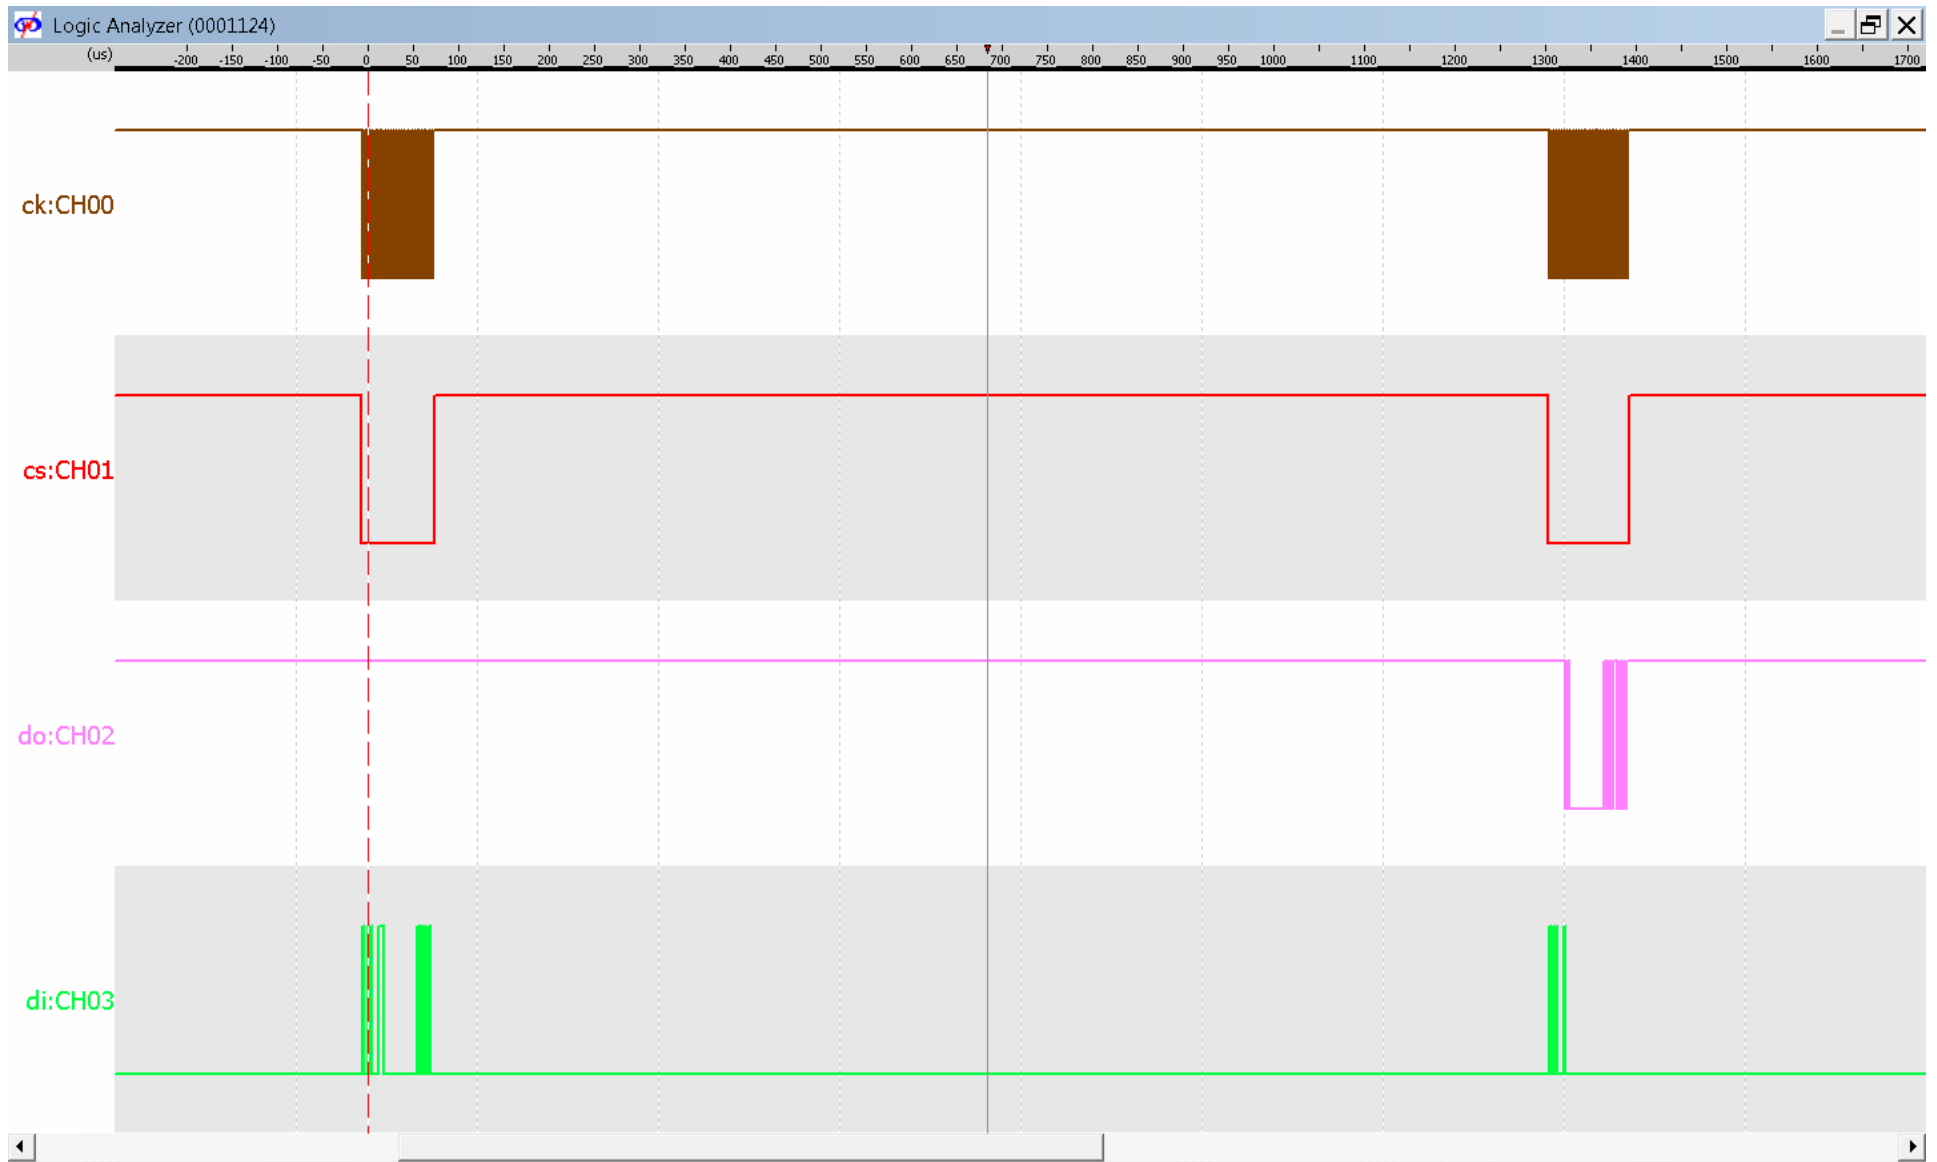

Complete write and read to 6802 transaction through sub-20